


Cyclone™

Electric Shaker

**** IMPORTANT ****

**DO NOT LIFT THE SHAKER BY
THE CAN CLAMP ASSEMBLY TO
REMOVE IT FROM THE BOX**

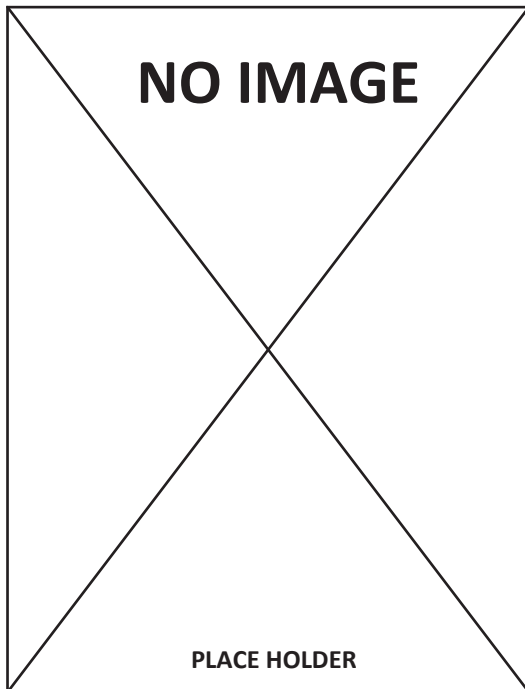

**The Electric Cyclone Shaker
is NOT approved
for hazardous areas.**

**Motor Specifications:
1/8HP 60HZ 115VAC 90W
1750RPM 1.4FLA**



IMPORTANT

Read and follow these instructions carefully to ensure proper operation and warranty protection of your new paint shaker. The shaker **MUST** be securely mounted to a sturdy surface.

WARRANTY

Dedoes warrants the Cyclone Electric Shaker against defects due to defective material, design or manufacturing for 3 years from the date of manufacturing. The warranty covers all manufactured parts on the shaker that are defective or damaged. All products, goods, services and equipment comply with all applicable environmental, safety, design and regulatory laws, regulations, customs and requirements of the region in which they are delivered and put into service. This warranty does not cover any items that have been damaged due to mutilation, alteration, misuse or abuse. Corrosion due to neglect or chemicals is not covered by this warranty. Dedoes will not be responsible for loss of time, inconvenience or other consequential damages.

Warranty is void: if there is any lack of lubrication and/or poor maintenance in which has caused the operation of the shaker to fail, if Dedoes parts are not used for repairs or installation, and if shaker is not installed properly.

This is the only warranty on Dedoes products and no other expressed warranty by anyone other than Dedoes, in writing, will be binding on the manufacturer. This warranty is transferable from the location of the original installation of the shaker to any additional installation location within the warranty time period.

Warranty return policy: Under no circumstances should the shaker or any part be returned to Dedoes for inspection, replacement, and/or repair without the written consent from Dedoes.

WARNING

The Cyclone Shaker is **NOT** approved for hazardous areas.

When lubricating, do not use motor oil. It requires a multipurpose calcium or lithium-based chassis grease. The grease should have neither gum and varnish removers nor petroleum distillates. Never use a grease with silicone in a paint shop.

INSTALLATION

The shaker may be bolted to a bench or table top, (hardware not included). The bench must be rigid or it may shake apart.

See last page for a mounting template.

Using the supplied power cord, plug the cord into the power port on the side of the shaker housing and plug the other end into a suitable electrical outlet.

Motor Specifications: 1/8HP 60HZ 115VAC 90W 1750RPM 1.4FLA







