
Cyclone Shaker Pedestal Mounting Instructions

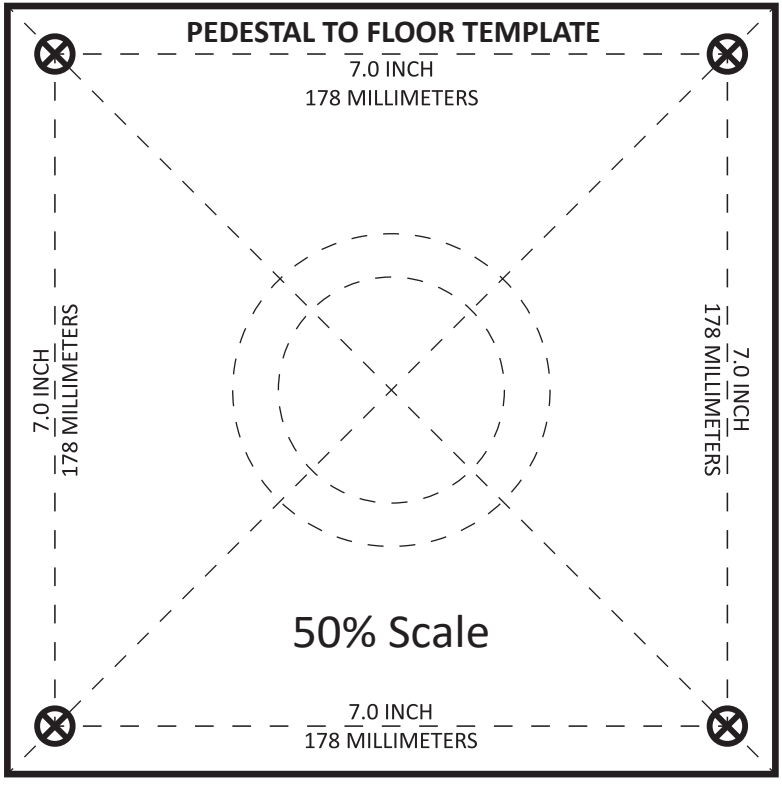

The supplied nuts and bolts are intended to attach the Cyclone Shaker to the pedestal. Hardware to mount the pedestal to the floor is not included.

The Pedestal base is 8.0 inch (203 mm) square. Each mounting hole is at a 0.5 inch (12.5 mm) from outer edges.

The recommended bolt length for mounting the pedestal to the floor is 1.5 inch (38 mm) to 2.0 inch (51 mm)minimum.

Drill four holes in the floor and install the pedestal with expansion bolt anchors and 3/8 inch (10 mm) machine bolts. (Not included)

The Pedestal includes six interior holes (not shown) to mount to a wheel and tire if desired. DO NOT use these holes to mount the Pedestal to the floor, damage will result. Use the outer holes in Pedestal base to mount it to the floor.

Pneumatic shakers include a drainage valve and should be installed into the pedestal column in the threaded hole. Remember to seal a pneumatic shaker to the pedestal with a non silicone elastic sealant to prevent leaks and reduce noise.